



COMP SUPERSCALAR

Installation Manual

VERSION: 1.3

November 27, 2015



This manual only provides information about how to install and configure COMPSs. Specifically, it details the installation process for Debian based distributions and for Red-Hat based distributions, and the steps to configure COMPSs properly.

If you are not wondering to install COMPSs please consider using our already prepared *Virtual Machine* available at our webpage: <http://compss.bsc.es> .

For further information about the application execution please refer to the *COMPSs User Manual: Application execution guide* available at <http://compss.bsc.es> .

For further information about the application development please refer to the *COMPSs User Manual: Application development guide* available at <http://compss.bsc.es/> .

For full COMPSs application examples (codes, execution commands, results, logs, etc.) please refer to the *COMPSs Sample Applications* available at <http://compss.bsc.es/> .

Contents

1	COMP Superscalar (COMPSs)	1
2	Packages description	2
2.1	Packages structure	2
2.2	Packages Dependencies	3
3	Debian-based distributions	4
3.1	Prerequisites	4
3.2	Package Repository	4
3.3	Installation	4
3.4	Post installation	7
4	RedHat-based distributions (zypper)	8
4.1	Prerequisites	8
4.2	Package Repository	8
4.3	Installation	8
4.4	Post installation	10
5	RedHat-based distributions (yum)	12
5.1	Prerequisites	12
5.2	Package Repository	12
5.3	Installation	12
5.4	Post installation	14
6	Supercomputers	15
6.1	Prerequisites	15
6.2	Installation	15
6.3	Post installation	16
7	Additional Configuration	19
7.1	Configure SSH passwordless	19
7.2	Configure the COMPSs Cloud Connectors	20
7.2.1	OCCI (Open Cloud Computing Interface) connector	20
8	COMPSs Removal	21
8.1	How to uninstall or remove COMPSs	21
8.2	How to clean repositories	21

1 COMP Superscalar (COMPSs)

COMP Superscalar (COMPSs) is a programming model which aims to ease the development of applications for distributed infrastructures, such as Clusters, Grids and Clouds. COMP Superscalar also features a runtime system that exploits the inherent parallelism of applications at execution time.

For the sake of programming productivity, the COMPSs model has four key characteristics:

- **Sequential programming:** COMPSs programmers do not need to deal with the typical duties of parallelization and distribution, such as thread creation and synchronization, data distribution, messaging or fault tolerance. Instead, the model is based on sequential programming, which makes it appealing to users that either lack parallel programming expertise or are looking for better programmability.
- **Infrastructure unaware:** COMPSs offers a model that abstracts the application from the underlying distributed infrastructure. Hence, COMPSs programs do not include any detail that could tie them to a particular platform, like deployment or resource management. This makes applications portable between infrastructures with diverse characteristics.
- **Standard programming languages:** COMPSs is based on the popular programming language Java, but also offers language bindings for Python and C/C++ applications. This facilitates the learning of the model, since programmers can reuse most of their previous knowledge.
- **No APIs:** In the case of COMPSs applications in Java, the model does not require to use any special API call, pragma or construct in the application; everything is pure standard Java syntax and libraries. With regard the Python and C/C++ bindings, a small set of API calls should be used on the COMPSs applications.

2 Packages description

2.1 Packages structure

Despite the fact that we recommend users to install the complete COMPSs Framework, we have built different packages to allow users customize as maximum as possible their installation. Figure 1 illustrates the COMPSs packaging structure and its internal dependencies.

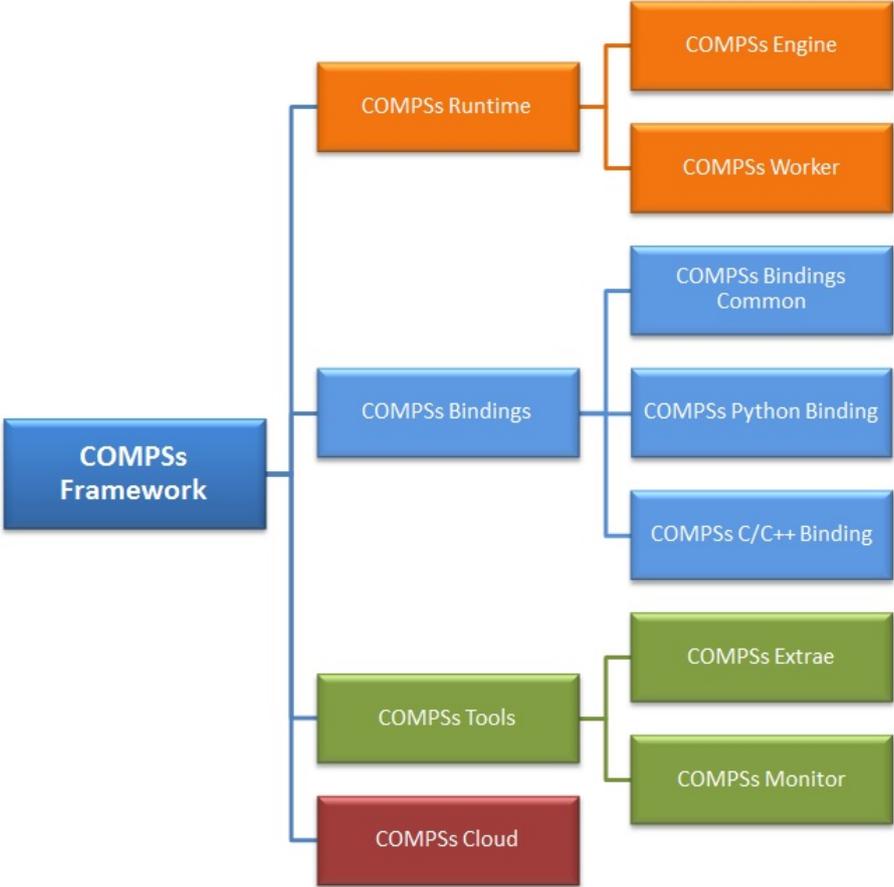


Figure 1: COMPSs packaging structure

2.2 Packages Dependencies

Next we provide a list of dependencies for each COMPSs package. The exact names may vary depending on the Linux distribution but this list provides a general overview of the COMPSs dependencies. For specific information about your distribution please check the *Depends* section at your package manager (apt, yum, zypper, etc.).

COMPSs Framework	compss-runtime, compss-bindings, compss-tools, compss-cloud
COMPSs Runtime	compss-engine, compss-worker
COMPSs Engine	openjdk-7-jre, graphviz, xdg-utils
COMPSs Worker	openjdk-7-jre
COMPSs Bindings	compss-bindings-common, compss-c-binding, compss-python-binding
COMPSs Bindings Common	compss-engine, openjdk-7-jre
COMPSs Python Binding	compss-bindings-common, python (≥ 2.7), libpython2.7
COMPSs C/C++ Binding	compss-binding-common, openjdk-7-jre, automake, libtool, libboost-serialization-dev, libboost-iostreams-dev
COMPSs Tools	compss-extrae, compss-monitor
COMPSs Extrae	compss-engine, openjdk-7-jre, libxml2 (≥ 2.5), libxml2-dev (≥ 2.5), gfortran
COMPSs Monitor	compss-engine, openjdk-7-jre
COMPSs Cloud	compss-engine, openjdk-7-jre

3 Debian-based distributions

3.1 Prerequisites

The commands described on the following sections require root privileges and Internet connection.

Once the installation process is finished, please log out and back in again to complete the installation.

3.2 Package Repository

To add the package repository you can easily download our predefined lists by executing the following command:

```
ubuntu x86_64 :
  wget http://compss.bsc.es/releases/repofiles/repo_deb_ubuntu_x86-64.list -O /etc/apt/
  sources.list.d/compss-framework_x86-64.list

ubuntu noarch :
  wget http://compss.bsc.es/releases/repofiles/repo_deb_ubuntu_noarch.list -O /etc/apt/
  sources.list.d/compss-framework_noarch.list

debian x86_64 :
  wget http://compss.bsc.es/releases/repofiles/repo_deb_debian_x86-64.list -O /etc/apt/
  sources.list.d/compss-framework_x86-64.list

debian noarch :
  wget http://compss.bsc.es/releases/repofiles/repo_deb_debian_noarch.list -O /etc/apt/
  sources.list.d/compss-framework_noarch.list
```

Next you need to add the repository key by executing:

```
wget -qO - http://compss.bsc.es/repo/debs/deb-gpg-bsc-grid.pub.key | apt-key add -
```

And finally, refresh the apt-get repositories:

```
apt-get update
```

3.3 Installation

This section describes how to install all the available COMPSs packages. If you are willing to have a full COMPSs installation just follow the COMPSs Framework instructions and skip directly to next section.

- **COMPSs Framework**

Contains all the COMPSs functionalities including the Runtime, all the bindings, all the tools and the cloud connectors.

To install this package please run:

```
apt-get install compss-framework
```

- **COMPSs Runtime**

Contains the COMPSs runtime to support the native functionalities. Install this package if you only need to support Java applications.

To install this package please run:

```
apt-get install compss-runtime
```

This package is composed of two sub-packages:

- **COMPSs Engine**

Contains the COMPSs Engine, essential to run COMPSs applications as master.

To install this package please run:

```
apt-get install compss-engine
```

- **COMPSs Worker**

Contains the minimum installation required to run a machine as a COMPSs worker.

To install this package please run:

```
apt-get install compss-worker
```

- **COMPSs Bindings**

Contains all the required bindings for C/C++ and Python applications.

To install this package please run:

```
apt-get install compss-bindings
```

This package is composed of three sub-packages:

- **COMPSs Bindings Common**

Contains the API required for the communication between any binding and the COMPSs Runtime. It is necessary for any binding installation.

To install this package please run:

```
apt-get install compss-bindings-common
```

– **COMPSs C/C++ Binding**

Contains the C/C++ Binding

To install this package please run:

```
apt-get install compss-c-binding
```

– **COMPSs Python Binding**

Contains the Python Binding

To install this package please run:

```
apt-get install compss-python-binding
```

• **COMPSs Tools**

Contains all the COMPSs Tools.

To install this package please run:

```
apt-get install compss-tools
```

This package is composed of three sub-packages:

– **COMPSs Extrae**

Contains the COMPSs Extrae tool needed to generate and process application traces.

To install this package please run:

```
apt-get install compss-extrae
```

– **COMPSs Monitor**

Contains the COMPSs Monitor tool needed to monitor the application execution.

To install this package please run:

```
apt-get install compss-monitor
```

- **COMPSs Cloud**

Contains all the COMPSs Connectors needed to interact with the Cloud.

To install this package please run:

```
apt-get install compss-cloud
```

3.4 Post installation

Once your COMPSs package has been installed remember to log out and back in again to end the installation process.

If you need to set up your machine for the first time please take a look at Section 7 for a detailed description of the additional configuration.

4 RedHat-based distributions (zypper)

4.1 Prerequisites

The commands described on the following sections require root privileges and Internet connection.

Once the installation process is finished, please log out and back in again to complete the installation.

4.2 Package Repository

To add the package repository you can easily download our predefined lists by executing the following command:

```
x86_64      : zypper addrepo -f http://compss.bsc.es/repo/rpms/stable/suse/x86_64 compss
noarch     : zypper addrepo -f http://compss.bsc.es/repo/rpms/stable/suse/noarch compss
```

And finally, refresh the repositories:

```
zypper refresh
```

4.3 Installation

This section describes how to install all the available COMPSs packages. If you are willing to have a full COMPSs installation just follow the COMPSs Framework instructions and skip directly to next section.

- **COMPSs Framework**

Contains the all COMPSs functionalities including the Runtime, all the bindings, all the tools and the cloud connectors.

To install this package please run:

```
zypper install compss-framework
```

- **COMPSs Runtime**

Contains the COMPSs runtime to support the native functionalities. Install this package if you only need to support Java applications.

To install this package please run:

```
zypper install compss-runtime
```

This package is composed of two sub-packages:

- **COMPSs Engine**

Contains the COMPSs Engine, essential to run COMPSs applications as master.

To install this package please run:

```
zypper install compss-engine
```

- **COMPSs Worker**

Contains the minimum installation required to run a machine as a COMPSs worker.

To install this package please run:

```
zypper install compss-worker
```

- **COMPSs Bindings**

Contains all the required bindings for C/C++ and Python applications.

To install this package please run:

```
zypper install compss-bindings
```

This package is composed of three sub-packages:

- **COMPSs Bindings Common**

Contains the API required for the communication between any binding and the COMPSs Runtime. It is necessary for any binding installation.

To install this package please run:

```
zypper install compss-bindings-common
```

- **COMPSs C/C++ Binding**

Contains the C/C++ Binding

To install this package please run:

```
zypper install compss-c-binding
```

– **COMPSs Python Binding**

Contains the Python Binding

To install this package please run:

```
zypper install compss-python-binding
```

• **COMPSs Tools**

Contains all the COMPSs Tools.

To install this package please run:

```
zypper install compss-tools
```

This package is composed of three sub-packages:

– **COMPSs Extrae**

Contains the COMPSs Extrae tool needed to generate and process application traces.

To install this package please run:

```
zypper install compss-extrae
```

– **COMPSs Monitor**

Contains the COMPSs Monitor tool needed to monitor the application execution.

To install this package please run:

```
zypper install compss-monitor
```

• **COMPSs Cloud**

Contains all the COMPSs Connectors needed to interact with the Cloud.

To install this package please run:

```
zypper install compss-cloud
```

4.4 Post installation

Once your COMPSs package has been installed remember to log out and back in again to end the installation process.

If you need to set up your machine for the first time please take a look at Section 7 for a detailed description of the additional configuration.

5 RedHat-based distributions (yum)

5.1 Prerequisites

The commands described on the following sections require root privileges and Internet connection.

Once the installation process is finished, please log out and back in again to complete the installation.

5.2 Package Repository

To add the package repository you can easily download our predefined lists by executing the following command:

```
x86_64 :  
  wget http://compss.bsc.es/releases/repofiles/repo_rpm_centos_x86-64.repo -O /etc/yum.  
  repos.d/compss-framework_x86-64.repo
```

5.3 Installation

This section describes how to install all the available COMPSs packages. If you are willing to have a full COMPSs installation just follow the COMPSs Framework instructions and skip directly to next section.

- **COMPSs Framework**

Contains the all COMPSs functionalities including the Runtime, all the bindings, all the tools and the cloud connectors.

To install this package please run:

```
yum install compss-framework
```

- **COMPSs Runtime**

Contains the COMPSs runtime to support the native functionalities. Install this package if you only need to support Java applications.

To install this package please run:

```
yum install compss-runtime
```

This package is composed of two sub-packages:

– **COMPSs Engine**

Contains the COMPSs Engine, essential to run COMPSs applications as master.

To install this package please run:

```
yum install compss-engine
```

– **COMPSs Worker**

Contains the minimum installation required to run a machine as a COMPSs worker.

To install this package please run:

```
yum install compss-worker
```

• **COMPSs Bindings**

Contains all the required bindings for C/C++ and Python applications.

To install this package please run:

```
yum install compss-bindings
```

This package is composed of three sub-packages:

– **COMPSs Bindings Common**

Contains the API required for the communication between any binding and the COMPSs Runtime. It is necessary for any binding installation.

To install this package please run:

```
yum install compss-bindings-common
```

– **COMPSs C/C++ Binding**

Contains the C/C++ Binding

To install this package please run:

```
yum install compss-c-binding
```

– **COMPSs Python Binding**

Contains the Python Binding

To install this package please run:

```
yum install compss-python-binding
```

- **COMPSs Tools**

Contains all the COMPSs Tools.

To install this package please run:

```
yum install compss-tools
```

This package is composed of three sub-packages:

- **COMPSs Extrae**

Contains the COMPSs Extrae tool needed to generate and process application traces.

To install this package please run:

```
yum install compss-extrae
```

- **COMPSs Monitor**

Contains the COMPSs Monitor tool needed to monitor the application execution.

To install this package please run:

```
yum install compss-monitor
```

- **COMPSs Cloud**

Contains all the COMPSs Connectors needed to interact with the Cloud.

To install this package please run:

```
yum install compss-cloud
```

5.4 Post installation

Once your COMPSs package has been installed remember to log out and back in again to end the installation process.

If you need to set up your machine for the first time please take a look at Section 7 for a detailed description of the additional configuration.

6 Supercomputers

The COMPSs Framework can be installed in any Supercomputer by installing its packages as in a normal distribution. The packages are ready to be reallocated so the administrators can choose the right location for the COMPSs installation.

However, if the administrators are not willing to install COMPSs through the packaging system, we also provide a **COMPSs zipped file** containing a pre-build script to easily install COMPSs. Next subsections provide further information about this process.

6.1 Prerequisites

In order to successfully run the installation script some dependencies must be present on the target machine. Administrators must provide the correct installation and environment of the following software:

- Autotools
- BOOST
- Java 7 JRE

The following environment variables must be defined:

- *JAVA_HOME*
- *BOOST_CPPFLAGS*

6.2 Installation

To perform the COMPSs Framework installation please execute the following commands:

```
# Check out the last COMPSs release
$ wget http://comps.bsc.es/repo/sc/stable/COMPSs_1.3.tar.gz

# Unpackage COMPSs
$ tar -xvzf COMPSs_1.3.tar.gz

# Install COMPSs at your preferred target location
$ cd COMPSs
$ ./install <targetDir>

# Clean downloaded files
$ rm -r COMPSs
$ rm COMPSs_1.3.tar.gz
```

The installation script will create a COMPSs folder inside the given *< targetDir >* so the final COMPSs installation will be placed under the *< targetDir > /COMPSs* folder. Please note that if the folder already exists it will be **automatically erased**.

After completing the previous steps, administrators must ensure that the nodes have

passwordless ssh access. If it is not the case, please contact the COMPSs team at *support-compss@bsc.es*.

The COMPSs package also provides a *compssenv* file that loads the required environment to allow users work more easily with COMPSs. Thus, after the installation process we recomend to source the *< targetDir > /COMPSs/compssenv* into the users *.bashrc*.

Once done, remember to log out and back in again to end the installation process.

6.3 Post installation

To check that COMPSs Framework has been successfully installed you may run:

```
# Check the COMPSs version
$ runcompss -v
COMPSs version 1.3
```

For queue system executions, COMPSs provides several prebuild queue scripts than can be accessible through the *enqueue_compss* command. Users can check the available options by running:

```
$ enqueue_compss --help
Usage: /apps/COMPSs/1.3/Runtime/scripts/user/enqueue_compss
      [queue_system_options] [COMPSs_options]
      application_name application_arguments

* Options:
General:
  --help, -h                Print this help message

Queue system configuration:
  - -exec_time=<minutes>    Expected execution time of
                           the application (in minutes)
                           Default: 10

  - -num_nodes=<int>        Number of nodes to use
                           Default: 2

  - -num_switches=<int>     Maximum number of different switches.
                           Select 0 for no restrictions.
                           Maximum nodes per switch: 18
                           Only available for at least 4 nodes.
                           Default: 0

  - -queue_system=<name>    Queue system to use: lsf | pbs | slurm
                           Default: lsf

  - -queue=<name>           Queue name to submit the job.
                           Depends on the queue system.
                           For example (MN3): bsc_cs | bsc_debug
                           | debug | interactive
                           Default: default

  - -job_dependency=<jobID> Postpone job execution until the job
                           dependency has ended.
                           Default: None

  - -tasks_per_node=<int>   Maximum number of simultaneous
                           tasks running on a node
                           Default: 16
```

```

- -master_working_dir=<path>           Working directory of the application
                                         Default: .

- -worker_working_dir=<name>           Worker directory. Use: scratch | gpfs
                                         Default: scratch

- -tasks_in_master=<int>               Maximum number of tasks that the master
                                         node can run as worker. Cannot exceed
                                         tasks_per_node.
                                         Default: 0

- -network=<name>                       Communication network for transfers:
                                         default | ethernet | infiniband | data.
                                         Default: infiniband

Runcompss delegated parameters:

Tools enablers:
- -graph=<bool>, - -graph, -g           Generation of the complete graph (true/false)
                                         When no value is provided it is set to true
                                         Default: false

- -tracing=<bool>, - -tracing, -t       Generation of traces (true/false)
                                         When no value is provided it is set to true
                                         Default: false

- -monitoring=<int>, - -monitoring, -m   Period between monitoring samples
                                         (milliseconds)
                                         When no value is provided it is set to 2000
                                         Default: 0

Runtime configuration options:
- -project=<path>                       Path to the project XML file
                                         Default: /gpfs/apps/MN3/COMPSSs/1.3/Runtime/
                                         configuration/xml/projects/project.xml

- -resources=<path>                     Path to the resources XML file
                                         Default: /gpfs/apps/MN3/COMPSSs/1.3/Runtime/
                                         configuration/xml/resources/resources.xml

- -lang=<name>                           Language of the application (java/c/python)
                                         Default: java

- -log_level=<level>, - -debug, -d       Set the debug level: off | info | debug
                                         Default: off

Advanced options:
- -comm=<path>                           Class that implements the adaptor
                                         for communications
                                         Supported adaptors:
                                         integratedtoolkit.nio.master.NIOAdaptor |
                                         integratedtoolkit.gat.master.GATAaptor
                                         Default:
                                         integratedtoolkit.nio.master.NIOAdaptor

- -library_path=<path>                   Non-standard directories to search
                                         for libraries (e.g. Java JVM library,
                                         Python library, C binding library)
                                         Default: Working Directory

- -classpath=<path>                       Path for the application classes / modules
                                         Default: Working Directory

- -task_count=<int>                       Only for C/Python Bindings. Maximum number
                                         of different functions/methods, invoked
                                         from the application, that have been
                                         selected as tasks
                                         Default: 50

```

```

- -uuid=<int>                                Preset an application UUID
                                              Default: Automatic random generation

- -PyObject_conversion=<bool>                Only for Python Binding. Enable the object
                                              conversion to string when possible
                                              (true/false).
                                              Default: false

* Application name:
  For Java applications: Fully qualified name of the application
  For C applications:   Path to the master binary
  For Python applications: Path to the .py file containing the main program

* Application arguments:
  Command line arguments to pass to the application. Can be empty.

```

If none of the pre-build sub-queue scripts adapts to your infrastructure (lsf, pbs, slurm, etc.) please contact the COMPSs team at *support – compss@bsc.es* to find out a solution.

If you are willing to test the COMPSs Framework installation you can run any of the applications available at our application repository <https://compss.bsc.es/projects/bar>. We suggest to run the java simple application following the steps listed inside its *README* file.

For further information about either the installation or the usage please check the *README* file inside the COMPSs package.

7 Additional Configuration

7.1 Configure SSH passwordless

By default, COMPSs uses SSH libraries for communication between nodes. Consequently, after COMPSs is installed on a set of machines, the SSH keys must be configured on those machines so that COMPSs can establish passwordless connections between them. This requires to install the OpenSSH package (if not present already) and follow these steps in each machine:

1. Generate an SSH key pair

```
$ ssh-keygen -t dsa
```

2. Distribute the public key to all the other machines and configure it as authorized

```
For every other available machine (MACHINE):  
$ scp ~/.ssh/id_dsa.pub MACHINE:~/myDSA.pub  
$ ssh MACHINE "cat ./myDSA.pub >> ~/.ssh/authorized_keys; rm ./myDSA.pub"
```

3. Check that passwordless SSH connections are working fine

```
For every other available machine (MACHINE):  
$ ssh MACHINE
```

For example, considering the cluster shown in Figure 2, users will have to execute the following commands to grant free ssh access between any pair of machines:

```
me@localhost:~$ ssh-keygen -t id_dsa  
# Granting access localhost -> m1.bsc.es  
me@localhost:~$ scp ~/.ssh/id_dsa.pub user_m1@m1.bsc.es:~/me_localhost.pub  
me@localhost:~$ ssh user_m1@m1.bsc.es "cat ./me_localhost.pub >> ~/.ssh/authorized_keys;  
rm ./me_localhost.pub"  
# Granting access localhost -> m2.bsc.es  
me@localhost:~$ scp ~/.ssh/id_dsa.pub user_m2@m2.bsc.es:~/me_localhost.pub  
me@localhost:~$ ssh user_m2@m2.bsc.es "cat ./me_localhost.pub >> ~/.ssh/authorized_keys;  
rm ./me_localhost.pub"  
  
me@localhost:~$ ssh user_m1@m1.bsc.es  
user_m1@m1.bsc.es:~> ssh-keygen -t id_dsa  
user_m1@m1.bsc.es:~> exit  
# Granting access m1.bsc.es -> localhost  
me@localhost:~$ scp user_m1@m1.bsc.es:~/.ssh/id_dsa.pub ~/userm1_m1.pub  
me@localhost:~$ cat ~/userm1_m1.pub >> ~/.ssh/authorized_keys  
# Granting access m1.bsc.es -> m2.bsc.es  
me@localhost:~$ scp ~/userm1_m1.pub user_m2@m2.bsc.es:~/userm1_m1.pub  
me@localhost:~$ ssh user_m2@m2.bsc.es "cat ./userm1_m1.pub >> ~/.ssh/authorized_keys; rm  
./userm1_m1.pub"
```

```

me@localhost:~$ rm ~/userm1_m1.pub

me@localhost:~$ ssh user_m2@m2.bsc.es
user_m2@m2.bsc.es:~> ssh-keygen -t id_dsa
user_m2@m2.bsc.es:~> exit
# Granting access m2.bsc.es -> localhost
me@localhost:~$ scp user_m2@m1.bsc.es:~/.ssh/id_dsa.pub ~/userm2_m2.pub
me@localhost:~$ cat ~/userm2_m2.pub >> ~/.ssh/authorized_keys
# Granting access m2.bsc.es -> m1.bsc.es
me@localhost:~$ scp ~/userm2_m2.pub user_m1@m1.bsc.es:~/userm2_m2.pub
me@localhost:~$ ssh user_m1@m1.bsc.es "cat ./userm2_m2.pub >> ~/.ssh/authorized_keys; rm
./userm2_m2.pub"
me@localhost:~$ rm ~/userm2_m2.pub

```

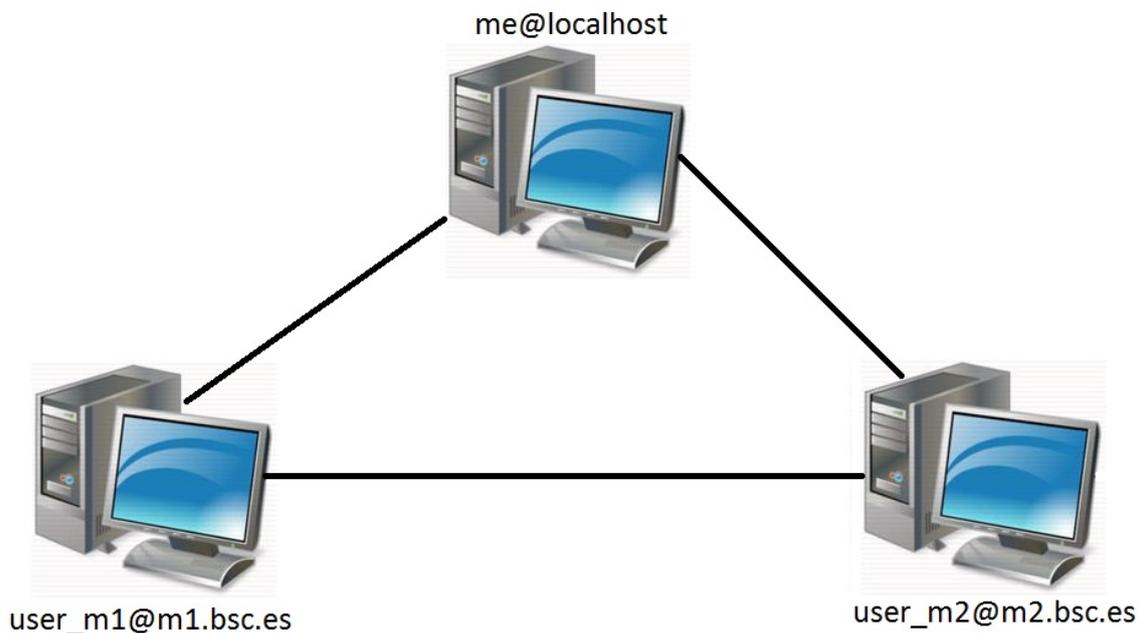


Figure 2: Cluster example

7.2 Configure the COMPSs Cloud Connectors

This section provides information about the additional configuration needed for some Cloud Connectors.

7.2.1 OCCI (Open Cloud Computing Interface) connector

In order to execute a COMPSs application using cloud resources, the rOCCI (Ruby OCCI) connector has to be configured properly. The connector uses the rOCCI CLI client (upper versions from 4.2.5) which has to be installed in the node where the COMPSs main application runs. The client can be installed following the instructions detailed at <http://appdb.egi.eu/store/software/rocci.cli>

8 COMPSs Removal

8.1 How to uninstall or remove COMPSs

COMPSs can be easily uninstalled via the *Linux Packaging Tools* by running the following commands:

```
Debian: apt-get remove compss-framework
RedHat (zypper): zypper remove compss-framework
RedHat (yum): yum remove compss-framework
```

Notice that some of the COMPSs packages are meta-packages and, thus, you will need to manually uninstall all the COMPSs packages or use the autoremove tools:

```
Debian: apt-get autoremove
RedHat (zypper): zypper remove --clean-deps compss-framework
RedHat (yum): yum autoremove
```

In *Debian* based distributions uninstalling COMPSs will not erase your configuration files. If you are willing to completely remove COMPSs please remember to use the *purge* option:

```
Debian: apt-get purge compss-framework
```

8.2 How to clean repositories

During the installation process you may have added the COMPSs repository. If you want to clean your repository list please erase the compss list by executing the following commands:

```
Debian:
$ rm -f /etc/apt/sources.list.d/compss-framework_*.list
$ apt-get update

RedHat (zypper):
$ zypper removerepo compss
$ zypper refresh

RedHat (yum):
$ rm -f /etc/yum.repos.d/compss-framework_*.repo
```

Please find more details on the COMPSs framework at
<http://comps.bsc.es>